


# KATO KR20 – H3

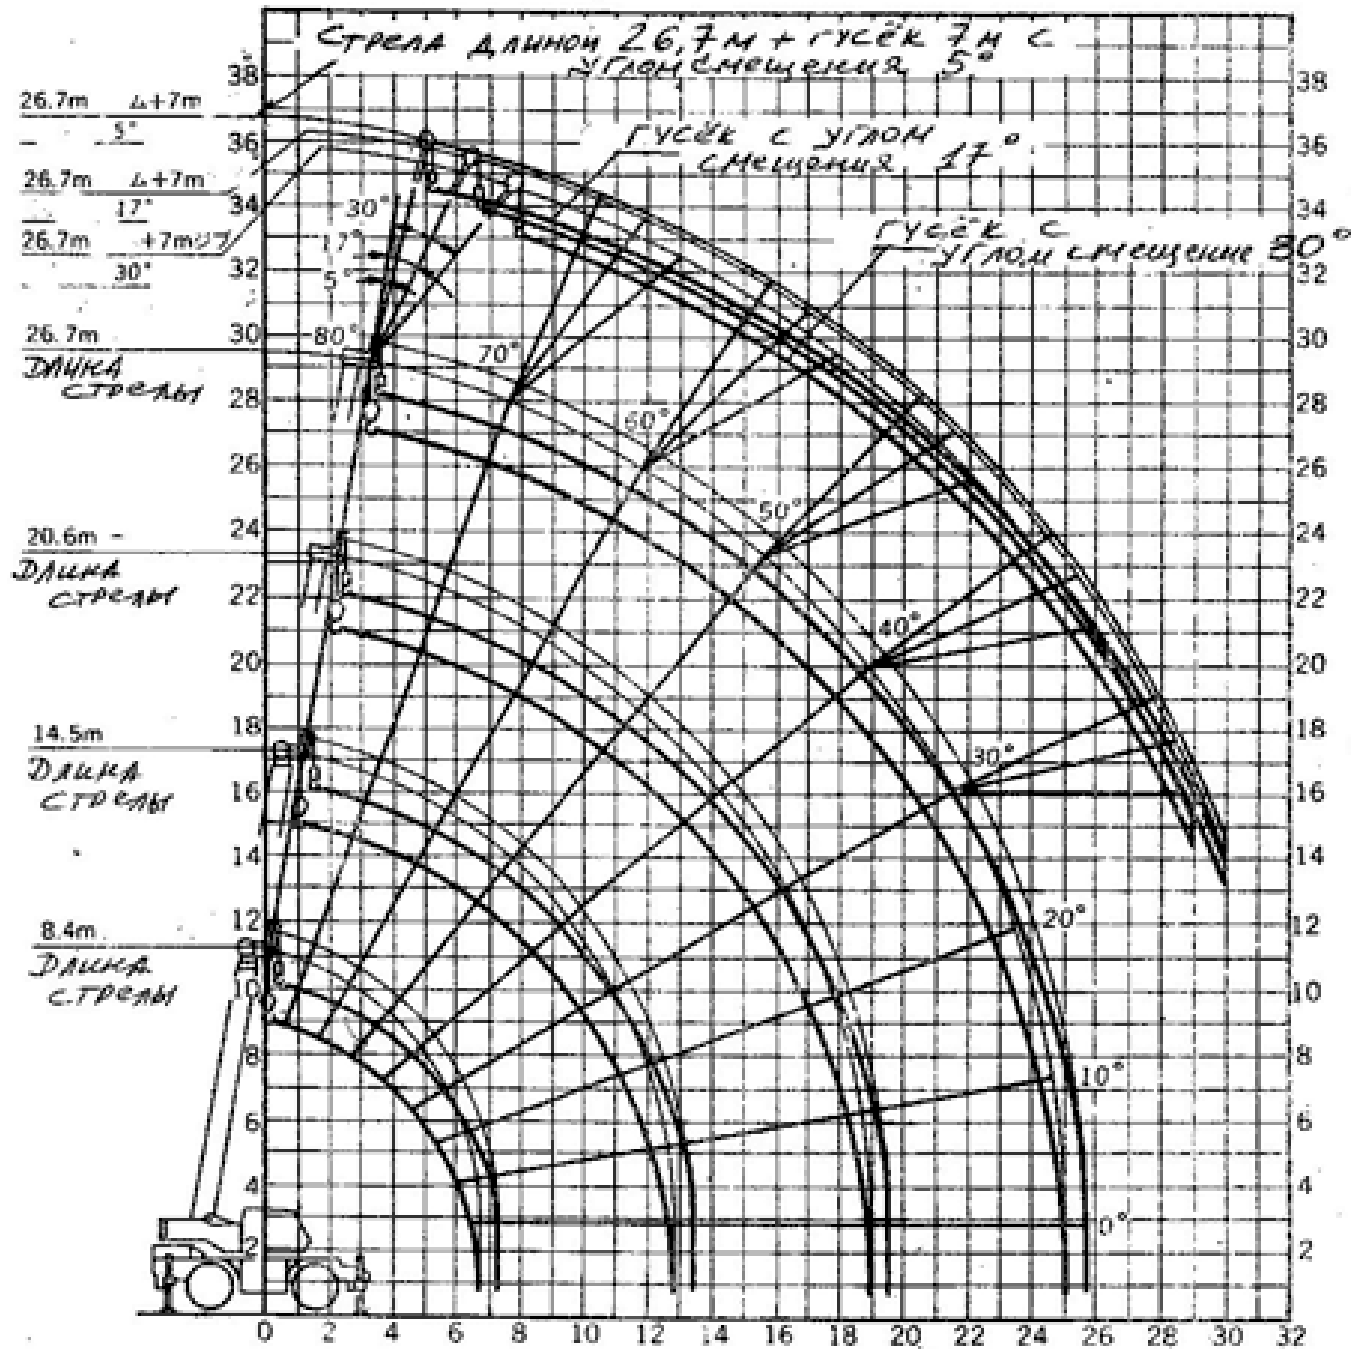

Общая номинальная грузоподъемность  
на выносных опорах, на основной стреле  
КАТО КР-20 Н-III

Рабочий радиус (вылет) (м)	Длина стрелы			
	8.4m	14.5m	20.6m	26.7m
2.5	20.00	16.00		
3.0	20.00	16.00		
3.5	20.00	16.00	9.00	
4.0	18.50	15.50	9.00	
4.5	16.50	14.20	9.00	6.80
5.0	15.00	13.10	9.00	6.80
5.5	13.70	12.10	9.00	6.80
6.0	12.50	11.20	9.00	6.80
6.5	11.50	10.40	8.50	6.80
7.0		9.70	8.00	6.80
8.0		8.45	7.10	6.10
9.0		6.70	6.40	5.50
10.0		5.45	5.80	5.00
11.0		4.50	5.05	4.55
12.0		3.80	4.30	4.20
13.0			3.70	3.80
14.0			3.20	3.45
15.0			2.80	3.00
16.0			2.40	2.65
17.0			2.10	2.35
18.0			1.85	2.10
19.0				1.85
20.0				1.60
22.0				1.25
24.0				0.95
25.0				0.80